


MOSO® Bamboo X-treme® Outdoor Decking & Siding accessories

MOSO® Fasteners

With these fasteners MOSO® Bamboo X-treme® Decking and Siding can be easily installed. When installed correctly there will be 3/16" gap between the boards. The fasteners are supplied with matching stainless steel screws (square bit). For installation on aluminium sub frame joist, special screws are available.

Product Code	Item	Material	Color	Dimensions (")	Dimensions (mm)
CLIP-SCREW-BX08	Fastener Asymmetric with screw (20 mm)	Stainless steel A2 (AISI304)	Brown	11/6 x 57/64 x 27/64	27 x 22.5 x 10.8
	Screw	Stainless steel A2 (AISI304)	Brown		4.5 x 30
CLIP-BX08	Fastener Asymmetric without screw (20 mm)	Stainless steel A2 (AISI304)	Brown	11/6 x 57/64 x 27/64	27 x 22.5 x 10.8
SCREW-09	Screw for aluminium sub frame joist	Stainless steel A2 (AISI304)	Brown		4.2 x 20

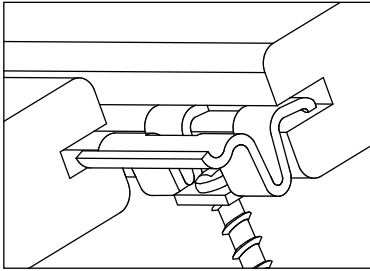

CLIP-SCREW-BX08
CLIP-BX08



Usage fastener / sqft

Bamboo X-treme® width	on center		
	16" / 406 mm	18" / 457 mm	24" / 610 mm
3 7/8" / 96 mm	2.65	2.12	1.8
5 3/8" / 137 mm	1.85	1.48	1.11
7" / 178 mm	1.43	1.14	0.86

MOSO® Bamboo X-treme® Sub Frame Joists

MOSO® Bamboo X-treme® Sub Frame Joists are made out of the same Thermo-Density® material as the decking. These joists are perfect for pedestal applications including patio recover and roof decks.

Pedestal sold separately.

Product Code	Material	Finish	Profile	Size	Dimensions (")	Dimensions (mm)
BO-SB155	Thermo Density® bamboo	Unfinished	S4S E4E	2 x 3	11/2 x 2 3/8 x 96	40 x 60 x 2440

